


5002 - 18' VENDING


2021 CHEVROLET 5500HD LCF – 176”
MODEL CODE CT54003

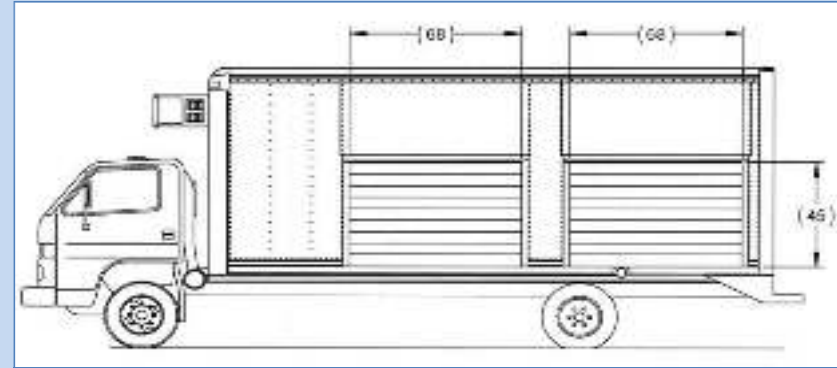


CAP COST: \$74,008.25

NOTE: All Images are strictly for reference purposes only.


Items installed may appear physically different on your specific vehicle.

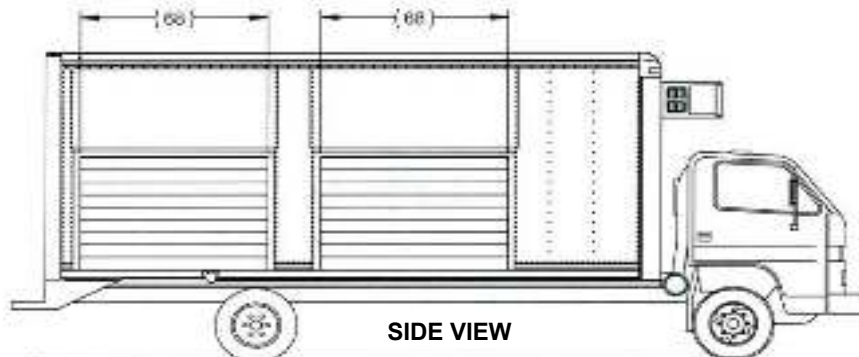

SIDE VIEW

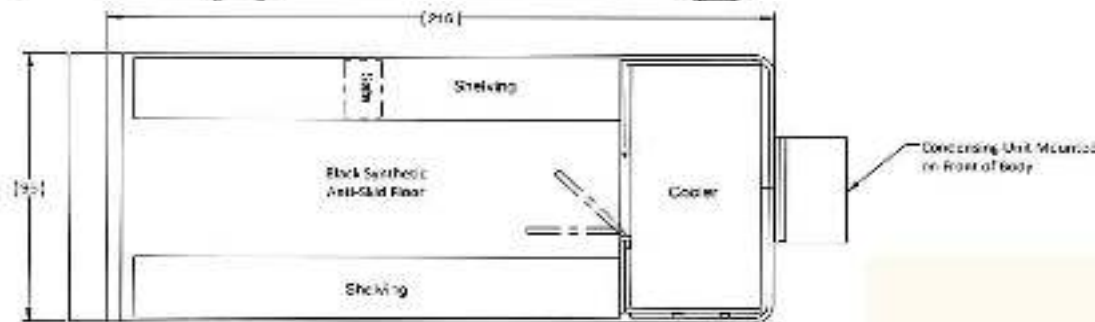

TOP VIEW

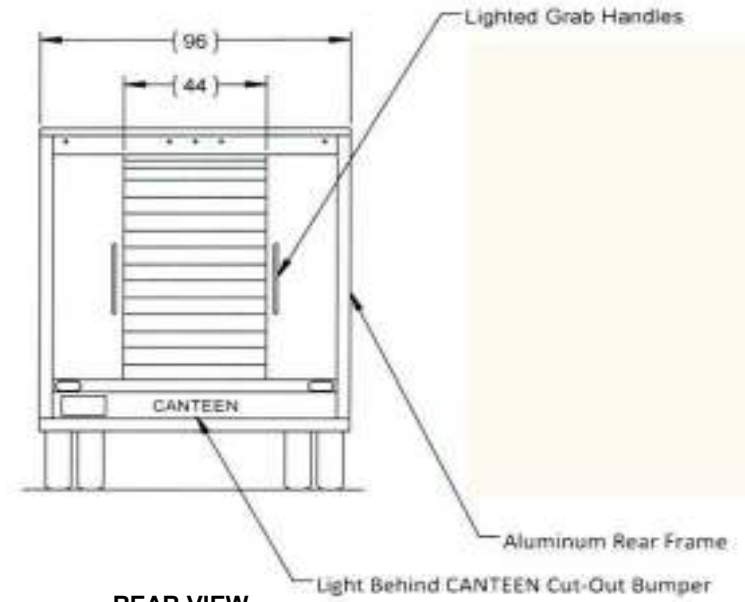

REAR VIEW

5002 18' VENDING TRUCK

96" WIDE OUTSIDE

18' LONG X 85" HIGH INTERIOR

ONE PIECE ANTI-SKID FLOOR

2 - DOME LIGHTS IN MAIN COMPARTMENT

4 - ADJUSTABLE ALUMINUM SHELVES ON FRONT WALL - SIDE BAYS FOR BEVERAGE CASES

2 - BAYS ON EACH SIDE OF THE BODY

TWO COMPARTMENT SAFE BETWEEN BAYS

REINFORCE SHELVES OVER BAYS

2 - ROWS SHELVING - FRONT TO REAR OVER SAFE ON STREETSIDE

10 - BAY COLA RACK - ALL 4 SET OF COLA RACKS ARE FOR 20 OZ BOTTLES

REFRIGERATED COOLER W/ DOME LIGHT - 4 - FULL COOLER SHELVES

30' X 78' STIP CURTAIN

COLD PLATE

NARROW WHITING PREMIUM REAR ROLL UP DOOR

ALUMINUM POOCHED BUMPER - 2" X 24" DOCK BUMPERS

2 - LIGHTED GRAB HANDLES AT ROLL UP REAR DOOR

ANTI SAIL MUD FLAPS

SAFETY EQUIPMENT

DOT LIGHTS AND REFLECTORS

BACK UP ALARM

FIRE EXTINGUISHER

TRIANGLE KIT

FIRST AID KIT

DOOR POUCH

INSPECTION BOOK

ZONE DEFENSE SYSTEM 23 CAMERA

2021 Chevrolet 5500HD LCF Diesel Regular Cab Base – 176”

Type	Code	Description
	16U	(0 P) Arc White
	HNF	(0 I) Very Dark Pewter
	1WT	Preferred Equipment Group 1WT
	2TB	Tires: Front 225/70R19.5F HWY BW Load index: 125/123.
	3TB	Tires: Rear 225/70R19.5F HWY BW Load index: 125/123.
	A1F	Front High Back Bucket Seats Includes single two occupant fold down passenger.
	C60	Single Zone Manual Air Conditioning Integral in-dash mounted.
	C7X	GVWR: 17,950 lbs (8,142 kg)
	DB8	Heated Exterior Mirrors (Port installed option).
	FNW	176" Wheelbase
	I1B	Engine: 5.2L 4 Cyl. 16V 215 hp [160.3 kW] @2500 rpm, 452 lb-ft of torque [612.8 Nm] @ 1850-2750 rpm (governed). Chain-driven dual overhead camshaft valve train, a cast iron cylinder block, and a cast aluminum cylinder head. Turbocharged, inter-cooled, water cooled EGR, direct injection, electronically controlled common rail fuel system and engine cruise control. Oil level check switch and light. Engine warning system with audible warning for low oil pressure, high coolant temperature, and a protection system that will reduce fueling if excessive coolant temperature is detected.
	IR7	Transmission: 6-Speed Auto Aisin A465 With fifth and sixth gear overdrive with lock up in 2nd, 3rd, 4th, 5th and 6th, PTO capability automatic torque converter lockup in stationary PTO mode.
	IX2	Rear Dome & Body Lamp Switch (Port installed option).
	KA2	Cold Weather Package w/Receptacle (Port installed option). Includes engine block heater and heated fuel filter.
	KG9	140 Amp Alternator
	MTE	Fire Extinguisher & Safety Reflector Mounting Provisions (Port installed option).
	N4C	50 State Emissions Certification
	NC2	Single Horizontal Exhaust

NH2	30 Gallon/113 L Rectangular Fuel Tank Mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill.
PAINT	Monotone Paint Application
PWK	Wheels: 19.5" x 6.0" K Steel
STD TM	Tricoat Cloth Seat Trim
TP7	Dual 750 CCA 12V Battery Maintenance free.
UIZ	Radio: AM/FM Stereo w/CD Player & Bluetooth Includes auxiliary jack and USB port.

Standard Equipment

Powertrain

Engine--5.2L (316.9 cu.in.) I-4 DOHC diesel direct injection 16 valve intercooled turbo diesel engine

Ignition Type--Compression ignition

Engine Location & Orientation--Longitudinal engine

Engine Head & Block--Iron engine block, aluminum engine head

Engine Cylinders--I-4

recommended fuel--Diesel

Alternator--140 amp alternator

Battery--1,500 CCA battery dual lead acid batteries

Transmission--6-speed electronic automatic transmission with overdrive

Transmission Lock-up--Transmission lock-up

Drive--Rear-wheel drive

Power Take-off Provision--Power take-off provision

Axle Ratio--5.12 axle ratio

Exhaust--Stainless steel exhaust

Emission Type--Federal emissions

Steering and Suspension

Steering--Hydraulic power-assist re-circulating ball steering

Brakes--Front disc/rear drum brakes

Front Suspension Independence--Front non-independent suspension

Front Suspension Type--Front leaf suspension

Front Anti-Roll Bars--Front anti-roll bar

Front Springs--Front tapered leaf springs

Front Shocks--Gas-pressurized front shocks

Rear Suspension Independence--Rigid rear axle

Rear Suspension Type--Rear leaf suspension
Rear Springs--Rear multi-leaf springs
Rear Shocks--Gas-pressurized rear shocks
Wheels--Front and dual rear 19.5" x 6.00" painted steel wheels
Tires--225/70R19.5F BSW highway front and rear tires

Safety

ABS--4-wheel anti-lock braking system with 4 ABS channels
Safety Lights--Daytime running lights

Comfort and Convenience Features

A/C & Heat--Air conditioning
Radio--AM/FM stereo, clock, seek-scan, with in-dash CD, CD-MP3 decoder, external memory control
Speakers--2 speakers
streaming audio--Streaming audio
Antenna--Fixed antenna
Cruise Control--Cruise control
Auxiliary Releases & Door Locks--Power door locks
12V DC Power Accessory Outlet--2 12V DC power outlets
Smokers Package--Ashtray
Lighter Elements--Front lighter element
Wireless Connectivity--Bluetooth
Instrumentation--Analog instrumentation display
Tachometer--Tachometer
Water Temp Gauge--Water temperature gauge
Systems Monitor--Systems monitor
Trip Computer--Trip computer
Trip Odometer--Trip odometer
Engine Hour Meter--Engine hour meter
Oil Pressure Warning--Oil pressure warning
Water Temp Warning--Water temperature warning
Battery Warning--Battery warning
Low Oil Level Warning--Low oil level warning
Low Coolant Warning--Low coolant warning
Low Fuel Warning--Low fuel warning
Service Interval Warning--Service interval warning
Transmission Fluid Temperature Warning--Transmission fluid temp warning
PRND in IP--PRND in IP

Steering Wheel--Steering wheel with tilt and telescopic adjustment

Windows--Power front windows

Tinted Windows--UV Protection

1-Touch Open--Driver 1-touch down window

Windshield--Fixed interval front windshield wipers

Dome Light--Dome light

Variable IP Lighting--Variable IP lighting

Floor Console--Partial floor console with storage

Overhead Console--Mini overhead console with storage

Glove Box--Glove box

Cupholders--Front cupholder

Instrument Panel Storage--Instrument panel bin

Dashboard Storage--Dashboard storage

Seatback Storage Pockets--2 seatback storage pockets

Door Bins--Driver and passenger door bins

Seating and Interior

Seating Capacity--Capacity of 3

Front Seats--Driver bucket/passenger bench bucket front seats

Front Head restraints--Fixed front head restraints

Front Armrest--Center front armrest

Driver's Seat--4-way adjustable driver seat with manual reclining, manual fore/aft

Passenger's Seat--2-way adjustable passenger seat with manual reclining

Front Seat Trim--Cloth faced front seats with cloth side and back

Headliner--Full cloth headliner

Front Floor Trim--Full vinyl/rubber floor covering

Floor Mats--Vinyl/rubber front floor mats

Deluxe Sound Insulation--Deluxe sound insulation

Cabback Insulator--Cabback insulator

Exterior Features

Body Material--Fully galvanized steel body material

Assist Steps--Assist steps

Window Moldings--Black side window moldings

Front Windshield Moldings--Black front windshield molding

Rear Window Moldings--Black rear window molding

Door Handles--Black door handles

Grille--Body-colored grille

Door Count--2 doors

Exterior Mirrors--Dual manual black convex spotter folding outside mirrors

Mirror Style--West coast style mirrors

Bumpers--Front body-colored bumpers

Exterior Lights--Aero-composite halogen headlamps

Cornering Lights--Cornering lights

Cab Clearance Lights--Cab clearance lights

Paint--Monotone paint

Warranty

Basic--36 month/unlimited mileage

Powertrain--36 month/unlimited mileage

Corrosion Perforation--48 month/unlimited mileage

Roadside Assistance--36 month/unlimited mileage

Diesel Engine--36 month/unlimited mileage

Dimensions and Capacities

output--215 hp@2,500 rpm

torque--452 lb.-ft.@1,850 rpm

Torque at Clutch Engagement--265lb.-ft. torque at clutch engagement

bore x stroke & compression ratio--4.5" bore x 4.9" stroke with a 18.50:1 compression ratio

1st gear ratio--3.742

2nd gear ratio--2.003

3rd gear ratio--1.343

4th gear ratio--1.000

5th gear ratio--.773

6th gear ratio--.634

reverse gear ratio--3.539

curb weight--6,686 lbs.

GVWR--17,950lbs.

Front GAWR--6,830 lbs.

Rear GAWR--12,980 lbs.

Front Curb Weight--4,324 lbs.

Rear Curb Weight--2,362 lbs.

Front Axle Capacity--6,830 lbs.

Rear Axle Capacity--14,550 lbs.

Front Spring Rating--8,440 lbs.

Rear Spring Rating--14,550 lbs.

Front Tire/Wheel Capacity--6,900 lbs.

Rear Tire/Wheel Capacity--12,980 lbs.

payload--11,264lbs.

GCWR--23,950 lbs.

front legroom--39.2"

front headroom--42.5"

front hiproom--66.6"

front shoulder room--70.7"

length--267.5"

body width--81.3"

body height--92.4"

wheelbase--176"

Cab to Axle--153.50 " from cab to axle

Axle to End of Frame--43.10 " from axle to end of frame

Frame Section Modulus--7.20 cu.in.

Frame Yield Strength--44,000.00 frame yield strength (psi)

front track--65.5"

rear track--65.6"

fuel tank--30.0 gal.